# TR321 Series Industrial Cellular Routers





# **Compact, Cost-effective IoT Router**

TR321 is a compact design entry-level IoT router built for industrial applications, such as vending machines, ATM, Kiosk, IP camera, digital signage, EV charging point, water treatment, solar panel power, etc.


TR321 provides high speed 4G LTE or dual mode LTE-M/NB-IoT for applications that require different data throughput. TR321 has 2-RJ45, 1-RS232, 1-RS485, WIFI, GNSS, and it is perfect for connecting the ethernet IP and serial port devices to cloud via cellular network. Besides, its auto switchover between wireless and wired WAN, multiple VPN features provide robust and secure connectivity for data transmission.

In addition, TR321 is an OpenWrt based Linux OS industrial IoT router, which provides C/C++, Python programmable embedded environment for IoT developers and programmers to implement their industrial applications in a flexible and fast way.

## **Key Features**

- 1. 4G LTE, 3G or LTE-M/NB-IoT version to choose
- 2. Auto switchover between wireless and wired WAN
- 3. 1-LAN, 1-WAN, 1-RS232, 1-RS485, WIFI(Option), GNSS(Option)
- 4. OpenWrt based Linux OS, provides programmable environment for C/C++, Python, LUA developers<sup>1</sup>
- 5. Multiple VPN protocols, IPsec, L2TP, PPTP, GRE and OpenVPN, to ensure secure data transmission
- 6. LTE/3G/PPPoE DHCP and static address connection
- 7. DHCP server, DHCP binding MAC address, DDNS, firewall, NAT, DMZ host, QoS, traffic analysis
- 8. MQTT, Modbus RTU/TCP, TCP/UDP, HTTP, BGP, SNMP protocols
- 9. SPI Firewall, Port Mapping, DMZ Mapping, ACL, IP-MAC binding and Clone function
- 10. Web UI, telnet & SSH CLI, AT Command configuration
- 11. Web upgrade, local and remote syslog, serial port output log
- 12. SMS commands and DMP(Device Management Platform)<sup>2</sup> for remote configuration and management

## Applications

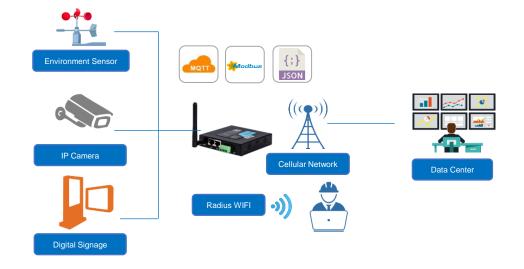

#### Success Cases



Cellular Interfaces		Power Supply and	Consumption		
<ul> <li>Antenna Connector</li> <li>SIM Slot</li> <li>ESD Protection</li> </ul> Ethernet Interface	1 × 50 Ω SMA Female 1 15KV	<ul> <li>Connector</li> <li>Standard Power</li> <li>Input Voltage</li> <li>Power Consumption</li> <li>Idle Consumption</li> </ul>	Plug-In DC 12V/1.5A 5-35 VDC 123 ~ 250mA@12VE 110 ~ 200mA@12VE		
<ul> <li>Ports</li> <li>Data Rates</li> <li>ESD Protection</li> </ul>	2-RJ45 (1-WAN, 1-LAN or 2-LAN configurable) 10/100 Mbps (Auto-Sensing), Auto MDI/MDIX 1.5KV	Physical Characteristics			
Serial Interfaces		<ul> <li>Ingress Protection</li> <li>Housing &amp; Weight</li> <li>Dimensions</li> </ul>	IP30 Metal, 320 g(0.71lbs), without accessories 100 x 100 x 23mm (3.94 x 3.94 x 0.91 in) Desktop, Wall mount, DIN-Rail		
<ul><li>Connector</li><li>Ports</li></ul>	Terminal block, 3.5 mm female socket with lock 1-RS232, 1-RS485	Mounting			
<ul><li>Baud Rate</li><li>ESD protection</li></ul>	300bps to 230400bps 8KV for RS232, 15KV for RS485	Environmental			
Wi-Fi(Option)		Operating Temperature     Storage Temperature	-35°C to +75°C (-31°F to +167°F) -40°C to +80°C (-40°F to +176°F) 5% to 95% (non-condensing) 1.5 kV RMS		
Antenna Connector Standard	1 × 50 $\Omega$ RP-SMA Female IEEE 802.11b/g/n, AP and Client modes	<ul><li> Relative Humidity</li><li> Ethernet Isolation</li></ul>			
<ul> <li>Transmission Rate</li> </ul>	IEEE802.11b/g: Up to 54Mbps IEEE802.11n: Up to 300Mbps	Others			
Security	Open, WPA, WPA2, WPA/WPA2 Enterprise, Radius	<ul> <li>Reset Button</li> <li>LED Indicators</li> </ul>	1 Power, WAN, LAN, WIFI, System, Alarm,		
Rx Sensitivity	18dBm (11g), 21dBm (11b) <-72dBm@54Mpbs	<ul> <li>Built-in</li> </ul>	Online, Signal Stre Watchdog, RTC, T		
GNSS (Option)		<ul> <li>Approvals<sup>3</sup></li> <li>Warranty Period<sup>4</sup></li> </ul>	CE, RCM, MTC, FCC, NBTC Standard: 12 Months Extended: 2-5 Years		
Module	GNSS from cellular module	• warranty Period			
<ul> <li>Antenna Connector</li> </ul>	1 × 50 $\Omega$ SMA Female	Standard Package Content			
Software				1 PCS	
Network Protocols	PPP, PPPoE, SNMP v1/v2c/v3, TCP, UDP,	<ol> <li>TR321 Router</li> <li>Power Adapter(DC 12)</li> </ol>			
- Network Protocola	DHCP, RIPv1/v2, OSPF, BGP, DNS, DDNS,	EU/US/UK/AU plug opt	ional)	4 000	
<ul> <li>Serial Port</li> </ul>	HTTP, ARP, QoS, SNTP, Telnet, SSH MQTT, Transparent (TCP Client/Server, UDP	<ol> <li>Mag-mount Cellular An Male, 1 meter, 5dBi)</li> </ol>	tenna (SMA	1 PCS	
	Client/Server), Modbus Gateway (Modbus RTU	4. RS232 Cable (DB9 Fer		1 PCS 1 PCS	
VPN Tunnel	to Modbus TCP) IPsec/PPTP/L2TP/GRE/OpenVPN	6. 5-Pin Terminal Block 1 PCS			
Firewall	ACL/DMZ/Port Mapping/MAC Binding	7. Wall mount kits		1 PCS	
Management	Web, CLI, SMS, Cloud DMP (Device Management Platform)				
<ul> <li>Reliability</li> </ul>	WWAN and WAN Failover, Hardware &				
<ul> <li>Secondary Development</li> </ul>	Software Watchdog OpenWrt based Linux OS, support C/C++ Python, LUA and SDK				

## **Order Information**

Model	Part Number	Description	Cellular Network	Frequency Band <sup>5</sup>	
TR321-LF	TR321-L<1>-<2>	4G Router, 1-RS232, 1-RS485, 2-RJ45	4G LTE 3G/WCDMA/UMTS/HSPA+ EDGE/GPRS	4G LTE CAT 4 • EMEA/Asia: B1/B3/B5/B7/B8/B20/B38/B40/B41 • ANZ/LATAM: B1/B3/B5/B7/B8/B28 • NA: B2/B4/B5/B12/B13/B14	
TR321-W	TR321-W<1>-<2>	3G Router, 1-RS232, 1-RS485, 2-RJ45	3G/WCDMA/UMTS/HSPA+ EDGE/GPRS	Global: 850/900/1900/2100	
TR321-M	TR321-M<1>	LTE-M/NB-IoT Router, 1-RS232, 1-RS485, 2-RJ45	LTE CAT M1/NB-IoT, EDGE/GPRS	APAC: FDD-LTE B1/B3/B5/B8 GPRS/EDGE 900/1800 MHz NA: FDD-LTE B2/B4/B12/B13 EU/AU: FDD-LTE B3/B8/B20/B28 CDPS/FDE 200/4900Mhz	
<ol> <li>&lt;1&gt; means modules for different cellular network, countries and regions.</li> <li>&lt;2&gt; W=2.4G single band WIFI GN=GNSS(from cellular module, not an independent GPS module)</li> </ol>				GPRS/EDGE 900/1800Mhz Global: FDD-LTEB1/B2/B3/B4/B5/B8/B12/B13 B17/B18/B19/B20/B25/B26/B28/(CAT-M1 only); GPRS/EDGE 850/900/1800/1900Mhz	

Note:


Python, LUA requires customized hardware and firmware, please contact Bivocom to discuss your application.
 There has a license fee for DMP
 \* Under progress


4. Price of the extended warranty will be different.

If you couldn't find the frequency band for your regions or have any questions, please contact Bivocom sales representatives for more information.
 To save the earth, Bivocom doesn't print the user guide, if you need it, please go to Bivocom website to <u>download</u>.

## Dimensions(mm)

Side Views

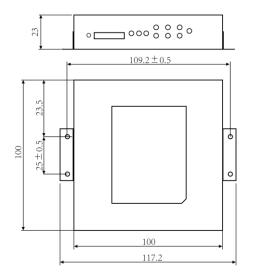

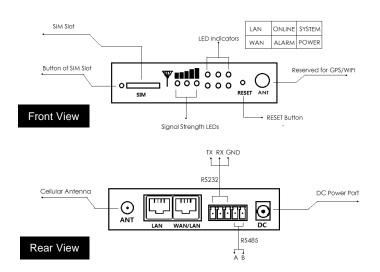

## **Related Products**

