


RLS-12 type Indoor g3 Load Break Switch

Standard and versatile circuit breakers for all primary applications

SF6-free

Perform 5000/3000 overhaul-free mechanical operations on most ratings. Modular spring-operated mechanical actuator ensuring easy operation. Have a complete range of accessories to satisfy all installation requirements. Have a standardized range of accessories and spare parts.

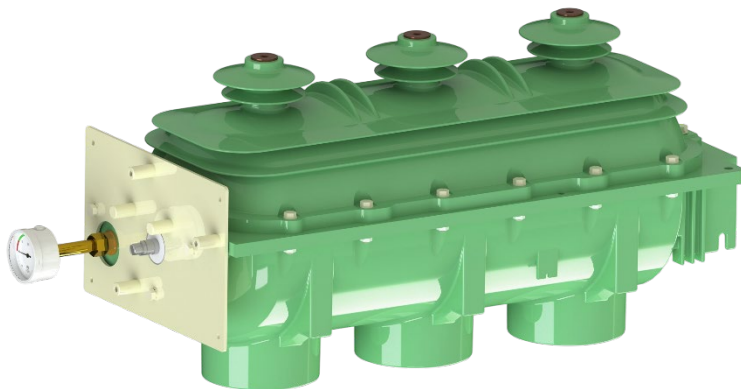

Rated voltage	12KV
Rated frequency	50/60HZ
Rated current	630/800A
Rated 1min power frequency withstand voltage (Dry/Wet)	38/42/48KV
Lightning impulse withstand voltage	75/85KV
Rated short circuit breaking current(peak)	80KA
Rated active load and close circuit breaking current	63A
Rated transferring current	1700A
Rated short circuit making current(peak)	80KA
Rated cable(line) charging breaking current	50 and 10A
Cable charge breaking current in earthing fault	20A
Rated withstand current(peak)	80KA
Short time withstand current (2s)	31.5KA
Mechanical life	5000/3000 times

Provided customized manufacture

Whole solutions for design, assembly, test...

Accountable solution for safety and reliability

Wide range offering, easy business and convenient installation

ROCKWILL®

Powered by [IEE Business](#)

