


RLS-24 type Indoor g3 Load Break Switch

Standard and versatile circuit breakers for all primary applications

SF6-free

Perform 2000 overhaul-free mechanical operations on most ratings.
 Modular spring-operated mechanical actuator ensuring easy operation.
 Have a complete range of accessories to satisfy all installation requirements.
 Have a standardized range of accessories and spare parts.

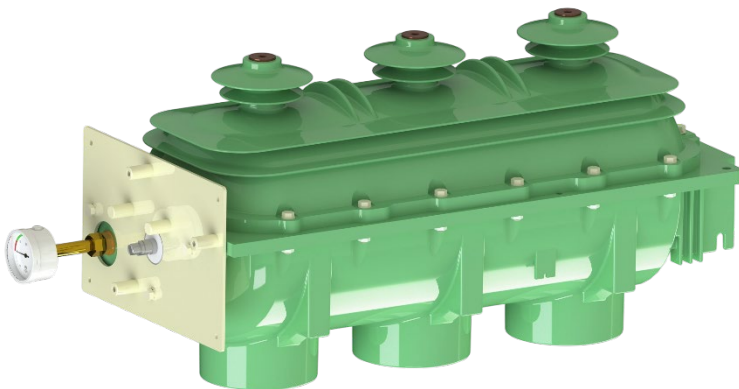

Rated voltage	24KV
Rated frequency	50/60HZ
Rated current	630/800A
Rated 1min power frequency withstand voltage (Dry/Wet)	50/60KV
Lightning impulse withstand voltage	125/150KV
Rated short circuit breaking current(peak)	63KA
Rated active load and close circuit breaking current	50A
Rated transferring current	1200A
Rated short circuit making current(peak)	63KA
Rated cable(line) charging breaking current	50 and 10A
Cable charge breaking current in earthing fault	20A
Rated withstand current(peak)	63KA
Short time withstand current (2s)	25KA
Mechanical life	2000times

Provided customized manufacture
 Whole solutions for design, assembly, test...
 Accountable solution for safety and reliability
 Wide range offering, easy business and convenient installation

