

RCS-3 Outdoor Vacuum Capacitor Switch

Compliant with IEC & ANSI standards




11kV38kV

Compact structure, space-saving design

Superior insulation performance

Smart secondary control & monitoring

Designed for substation use

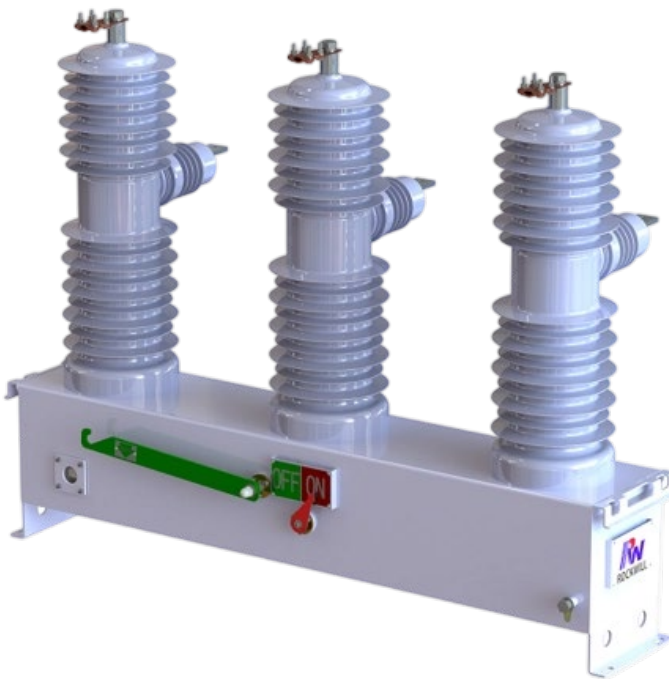

Rated voltage	11...38 KV	
Capacitive switching current	200...600 A	
Rated frequency	50/60 HZ	
Power frequency 1min	Dry	60...85kV
	Wet	55...70 kV
Lightning impulse withstand voltage (peak value) alternate, opposite/fracture	75...170 kV	
Short-time symmetrical withstand current	6.3...8kA	
Fault making peak current	32.5 kA	
Symmetrical fault-making current	12.5...16 kA	
High frequency transient making peak current	25 kA	
Rated operating circulate	O-0.3s-CO-180s-CO	
Rated transient inrush frequency	6000 Hz	
Withstand peak current	32.5 kA	
Mechanism life	30,000 times	
Secondary loop 1 min power frequency withstand voltage	2 KV	
Auxiliary voltage	110/200 AC/DC V	

Provided customized manufacture

Whole solutions for design, assembly, test...

Accountable solution for safety and reliability

Wide range offering, easy business and convenient installation

ROCKWILL®

Powered by [IEE Business](#)