


DRAWING IS SUBMITTED TO/FOR:
 DESIGN
 CHECKED BY:
 APPROVED V./COMPLIES
 AS-SPEC
 MAN.

B
 Connection terminal
 Material: Al alloy

Anchor bolt
 (Providing by client)

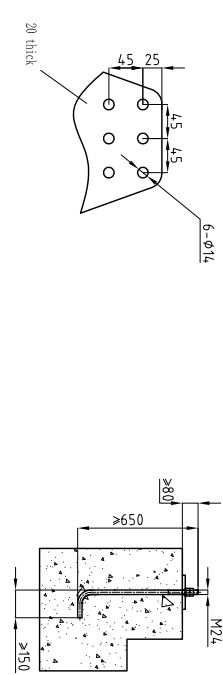

NOTE:

- 1)、Foundation static load: 15000N
 Foundation dynamic load:
 horizontal direction: 5000N
 Vertical direction (upward): 25000N, including self weight
- 2)、The height difference of the foundation shall not exceed 2mm
 The levelness of each base surface shall not exceed 2mm
- 3)、Weight: 1500KG
- 4)、Package size 1 : 2820x1300x450 (1 pcs), 1000KG;
 Package size 2 : 4100x800x2300 (1 pcs), 680KG.

Main technical parameters of the product

Item	Unit	Parameter
Rated voltage	kV	123
Rated frequency	Hz	50/60
Rated current	A	up to 3150
Rated short-time withstand current, up to 3 s	kA	40
Rated peak withstand current	kA	100
Rated short-circuit power-frequency withstand voltage, 1 min	kV	230
Power-frequency withstand voltage, 1 min across open contacts	kV	365
Rated lightning impulse withstand voltage, 1.2/50 μs	kV	550
Rated lightning impulse withstand voltage, 1.2/30 μs, across open contacts	kV	650
Rated filling pressure (abs. at 20 ° C) circuit-breaker	Mpa	0.6
Minimum functional pressure (abs. at 20 ° C) circuit-breaker	Mpa	0.5
Temperature range (ambient)	° C	-30...+40
Type of installation		outdoor
Partial discharge capacity	PC	≤3
SF6 leakage rate per year		≤0.5%
Maintenance cycle	Year	30

WENZHOU ROCKWILL ELECTRIC CO.LTD.

PRODUCT:

APPROVED BY:

DATE:

MODEL:

RHB-123

REVISION:

01

DESIGNED & CHECKED BY:

APPROVED BY:

DATE:

DWG. NO.:

FILE:

SCALE:

PAGE:

TOTAL PAGE: