


REVISION IS SUBMITTED TO/FR:

APPROVED BY:	REWORKED BY:	DATE:
<input type="checkbox"/> REWORKED	<input type="checkbox"/> REWORKED	<input type="checkbox"/> REWORKED
<input checked="" type="checkbox"/> APPROVED	<input checked="" type="checkbox"/> APPROVED	<input checked="" type="checkbox"/> APPROVED

Main Parameters :

- 1): 38kV 630A 50Hz Vacuum Auto Recloser;
- 2): STC: 20kA/3s
- 3): BIL 170kV
- 4): With 3pcs in-built CT (400/1A)
- 5): With 3pcs voltage sensor
- 6): With controller and control cable 7m
- 7): With operation counter
- 8): Clearance between Phase to phase: >387mm
- 9): Clearance between phase to earth : >490mm
- 10): Mechanism operation voltage: DC220V
- 11): Control voltage: DC24V
- 12): Operation sequence: 0-0.3s-C0-180s-C0
- 13): The creepage distance of fracture is 1214mm, and creepage distance(phase to earth) :1250mm
- 14): IEC standard: IEC62271-111

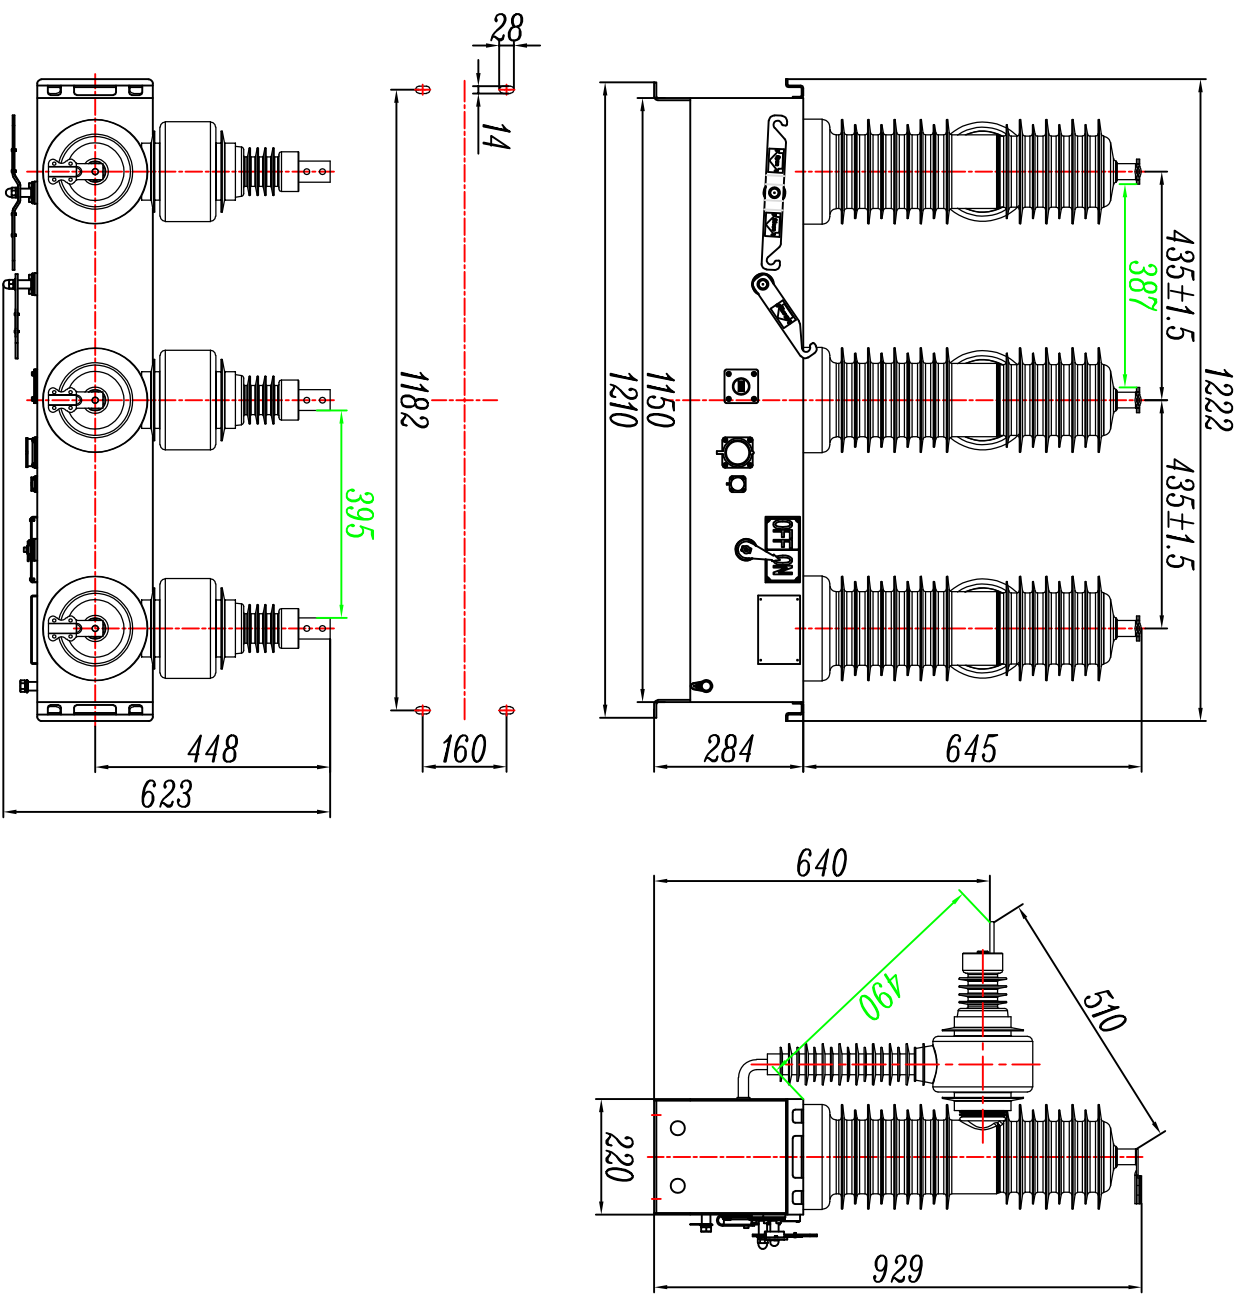

WENZHOU ROCKWILL ELECTRIC CO. LTD.

Size for RCM-E38N/630-20

DATE :	01/4/2025	SCALE:	1
APPROVED BY:		DATE:	01/4/2025
CHECKED BY:		DATE:	01/4/2025
DESIGNED BY:		DATE:	01/4/2025