

REVISION IS SUBMITTED TO/ BY:


APPROVED BY: REVISION NO.

DESIGNED BY: CHECKED BY:

DRAWN BY: DATE:

Main Parameters :

- 1): 15kV 630A 50Hz Vacuum Auto Recloser;
- 2): STC: 20kA/3s
- 3): BIL 110kV
- 4): With 3pcs in-built CT (400/1A)
- 5): With 3pcs voltage sensor
- 6): With controller and control cable 7m
- 7): With operation counter
- 8): Clearance between Phase to phase: >320mm
- 9): Clearance between phase to earth : >339mm
- 10): Mechanism operation voltage: DC220V
- 11): Control voltage: DC24V
- 12): Operation sequence: 0-0.5s-C0-2s-C0-5s-C0
- 13): The creepage distance of fracture is 995mm, and creepage distance(phase to earth) : 590mm
- 14): IEC standard: IEC62271-111

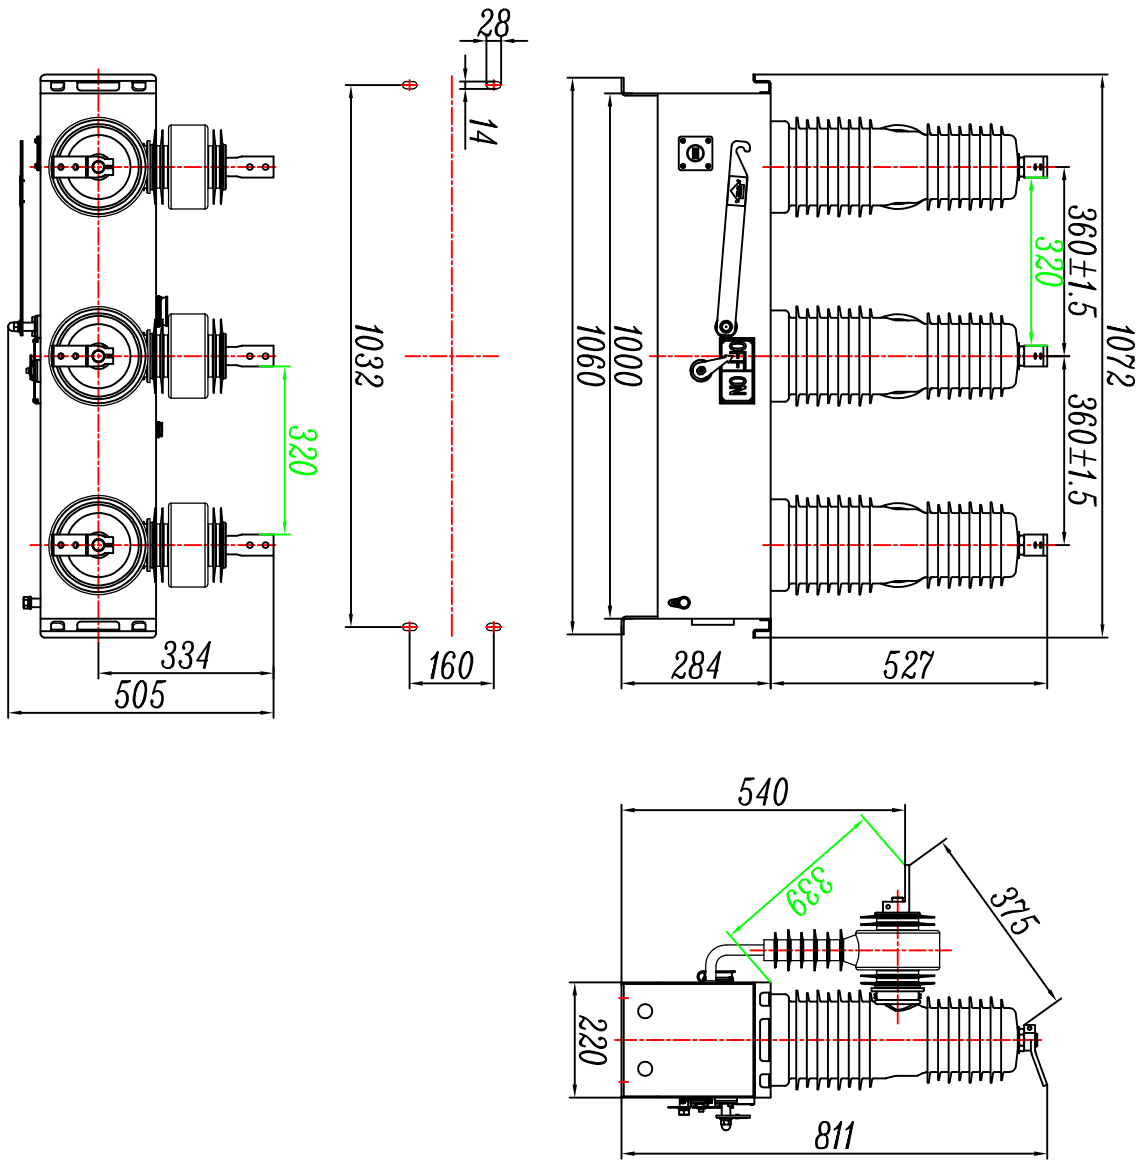

PROJECT:	APPROVED BY:	DATE:	SCALE:	SHEET NO.
				1
TITLE		Size for RCW-E15M/630-20		
REVISION	NO.	DATE	BY	DESCRIPTION
	01	01/14/2025		
DRAWN :		CHECKED BY:		DATE :
APPROVED:		DATE :		01/14/2025
DWG. NO.		PAGE 1: Total 1 pages		