


REVISION IS SUBMITTED TO/VER:

APPROVED BY:	REWORKED BY:	REWORKED DATE:
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
REVISION NO.:	REWORKED NO.:	REWORKED DATE:

Main Parameters :

- 1): 12kV 630A 50Hz Vacuum Auto Recloser;
- 2): STC: 20kA/3s
- 3): BIL 75kV
- 4): With 3pcs in-built CT (400/1A)
- 5): With 3pcs voltage sensor
- 6): With controller and control cable 7m
- 7): With operation counter
- 8): Clearance between Phase to phase: >320mm
- 9): Clearance between phase to earth : >297mm
- 10): Mechanism operation voltage: DC220V
- 11): Control voltage: DC24V
- 12): Operation sequence: 0-0.5s-C0-2s-C0-5s-C0
- 13): The creepage distance of fracture is 785mm, and creepage distance(phase to earth) : 580mm,
- 14): IEC standard: IEC62271-111

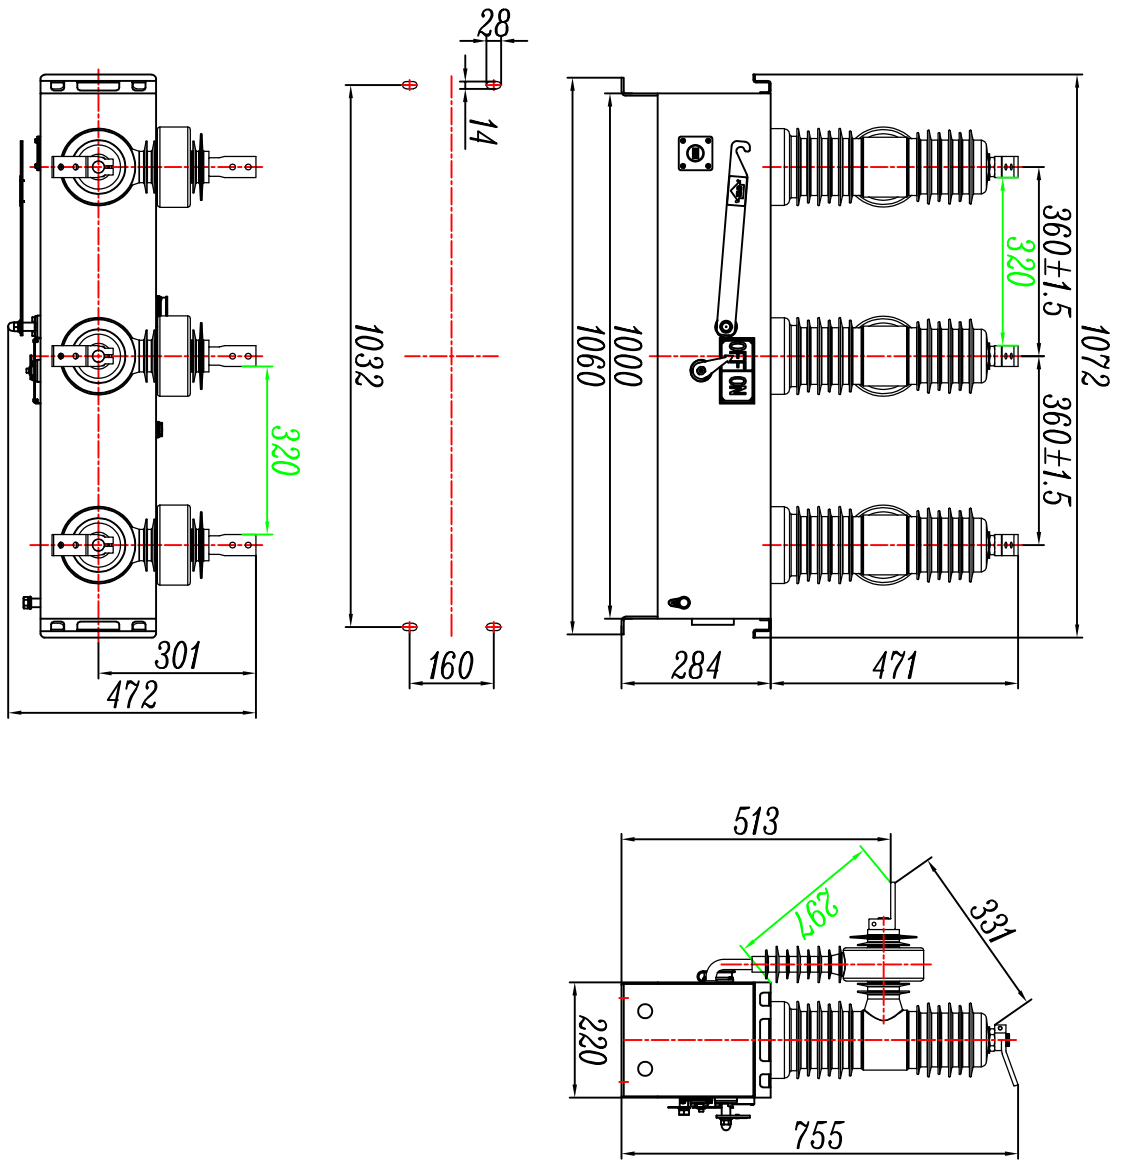

WENZHOU ROCKWILL
ELECTRIC CO.,LTD.

PROJECT:	APPROVED BY:	DATE:	SCALE:	SHEET NO.
				1
TITLE		Size for RCM-E12M/630-20		
REVISION	NO.	DATE		
	01	01/14/2025	Page 1: Total 1 pages	
DESIGN:	CHECKED BY:	DATE:	DWG. NO.	CONT. NO.
				1